



Caratteristiche Tecniche

- Materiali utilizzati NR/SBR, TPU, ABS
- Grado di protezione IP30XC
- Tensione isolamento 3kV
- Resistenza di isolamento 51 GΩ
- Carico massimo da 200Kg a 40t su 20x20 cm
- Tensione di esercizio 1000V C.A. - 1500V C.C.
- Campo di durezza da 78 a 95 (Shore A)

Riferimenti a Norme

- Conforme alla Norma CEI 64.8 (sez. 704, 708, 752)
- Conforme alla Direttiva RoHS 2015/863/EU
- Conforme alla Direttiva B.T. 2014/35/EU

Campi di utilizzo

Cantieri, camping, teatri all'aperto, saloni espositivi, mercati, sagre, zone militari, aree pubbliche, concerti, ospedali da campo, ecc.

Marchi e Certificazioni

- Marcatura CE

Colori disponibili

- Nero, Nero/Giallo

Technical Features

- Materials used NR/SBR, TPU, ABS
- Protection degree IP30XC
- Insulation voltage 3kV
- Insulation resistance 51 GΩ
- Maximum load from 200Kg to 40t on 20x20 cm
- Operating voltage 1000V AC - 1500V DC
- Hardness range from 78 to 95 (Shore A)

Norms Reference

- Complies with standard CEI 64.8 (sec. 704, 708, 752)
- Compliant with RoHS Directive 2015/863/EU
- Compliant with the Low Voltage Directive 2014/35/EU

Fields of use

Construction, camping, open-air theaters, exhibition halls, markets, festivals, military areas, public areas, concerts, field hospitals, etc.

Marks and Certifications

- CE marking


Available colours

- Black, Black/Yellow


Canale copricavo Cable cover

Materiale: TPU (Poliuretano termoplastico)
Colore: Nero
Peso: 1,3 Kg(ZCU1), 3,8 Kg(ZCU2)
Capacità di carico: 200 Kg(ZCU1), 5 Tons(ZCU2)
Temperatura di esercizio: -25°C +60°C
Campo di durezza: 92A
Classe di infiammabilità: B2

Material: TPU (Thermoplastic polyuretane)
Colour: Black
Weight: 1,3 Kg(ZCU1), 3,8 Kg(ZCU2)
Load capacity: 200 Kg(ZCU1), 5 Tons(ZCU2)
Working temperature: -25°C +60°C
Hardness field: 92A
Flammability class: B2

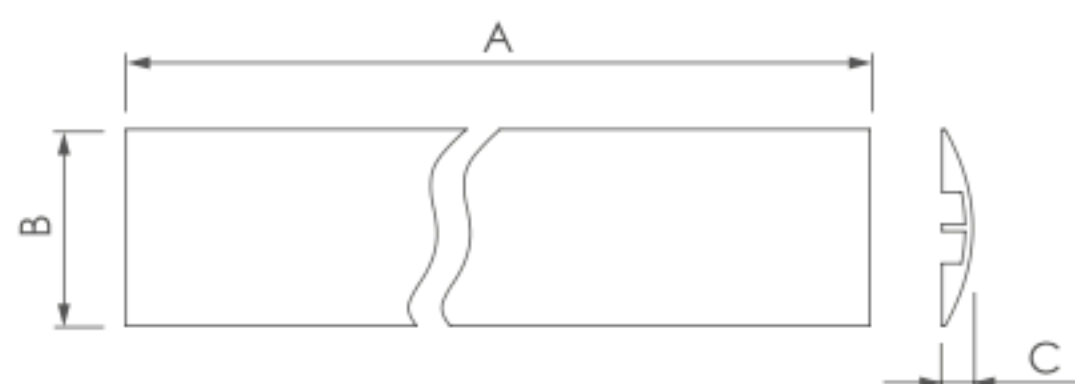


Articolo Item	Descrizione Description	A mm	B mm	C mm
ZCU1	1 scomparto 1 channel	900	140	20
ZCU2	2 scomparti 2 channels	900	275	40

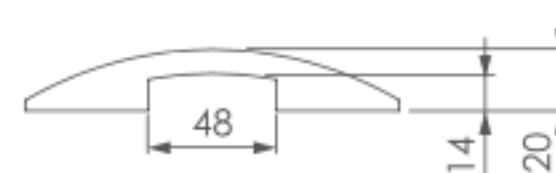

Canale copricavo snodato Articulated cable cover

Materiale: ABS rigido (acrilonitrile butadiene stirene)
Colore: Nero e giallo
Peso: 0,8 Kg(ZCV1), 1,5 Kg(ZCV2)
Capacità di carico: 200 Kg(ZCV1), 1 Tons(ZCV2)
Temperatura di esercizio: -25°C +60°C
Campo di durezza: 95A
Classe di infiammabilità: B2

Material: Rigid ABS (acrylonitrile butadiene styrene)
Colour: Black and yellow
Weight: 0,8 Kg(ZCV1), 1,5 Kg(ZCV2)
Load capacity: 200 Kg(ZCV1), 1 Tons(ZCV2)
Working temperature: -25°C +60°C
Hardness field: 95A
Flammability class: B2

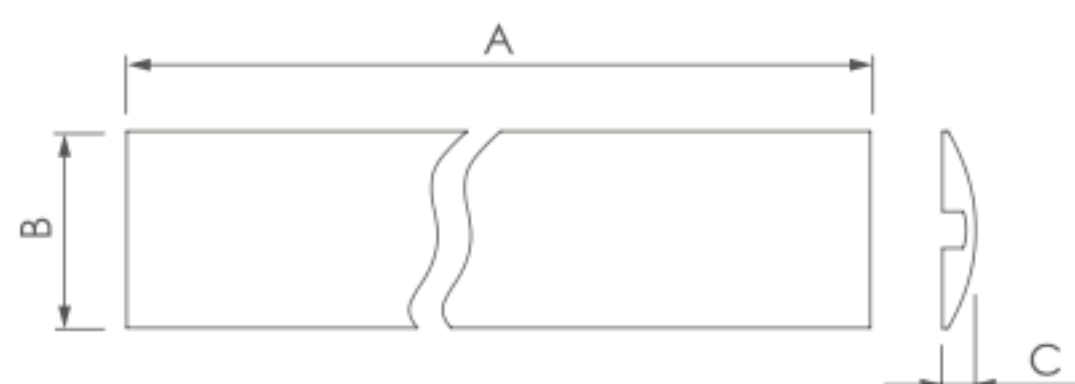

Articolo Item	Descrizione Description	A mm	B mm	C mm
ZCV1	1 scomparto 1 channel	1000	80	15
ZCV2	1 scomparto 1 channel	1000	150	25

